




NOTES:

- Current Rating: 1.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Phosphor Bronze
- Contact plating: Au Or Sn over Ni
- Insulator Material: PBT+30%G.F UL94V-0

# Ordering Information

No. of Pins	Contact Plating	Color Insulator
06P 26P	S0=Gold Flash/Ni	B=Black
08P 30P	S3=10u"Gold/Ni	G=Grey(427C)
10P 34P	S4=15u"Gold/Ni	E=Grey(413C)
12P 36P	S5=30u"Gold/Ni	SN=Tin
14P 40P		
16P 44P		
18P 50P		
20P 60P		
22P 64P		
24P		

Item	Pitch	Mating
Standard	2.00	3121
Alternate		

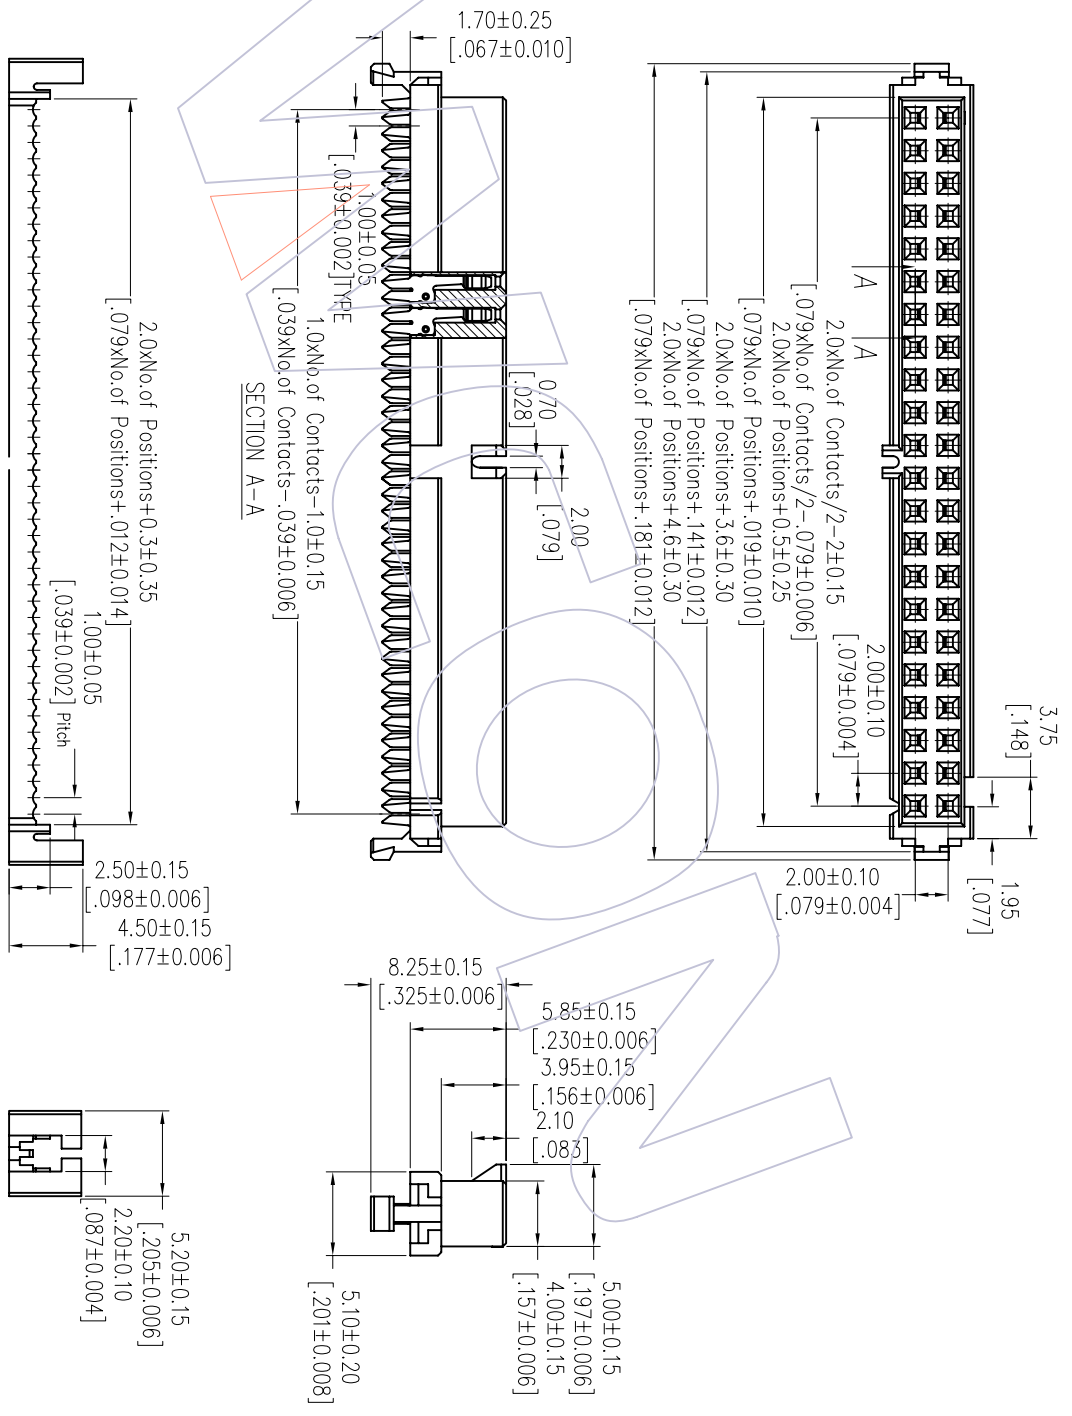

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	<b>WCON</b> Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
			DIW	± 3°	APPROVE	DATE	SHEET	1/1	Customer NO.	
			TOL	± 0.15	CHECK	DATE	SIZE	A4	TITLE:	
				± 0.25	JYHuogng	2012/10/10	UNIT	mm	2.00 IDC SOCKET WITH BUMP (T-TYPE)	

1 2 3 4 5 6 7 8 9 10

1 2 3 4 5 6 7 8 9 10