

NOTES:


- Current Rating: 0.5A
- Voltage Rating: 50V AC/DC
- Contact Resistance: 50miliohm Max
- Insulation Resistance: 100Megohm Min
- Operation Temperature: -20°C to +105°C
- Housing Material: PA9T (UL94V-0)
- Cap. Material: LCP (UL94V-0)
- Contact Material: Phosphor Bronze
- Contact plating: Au or Sn over Ni

Ordering Information

3610-P XXXX - XXXX XX R 01

- No. of Pins
- Housing High
- Contact Plating
- T=Tube
- GI=3u"Gold
- G2=5u"Gold
- S1=3u"Gold/Tm
- S2=5u"Gold/Tm
- 10P
- 20P
- 30P
- 40P
- 50P
- 80P
- 100P

ASSY HIGH(H)	PLUG(H1)	SOCKET(H2)
4.00	1.00	3.00
4.50	1.50	3.00
5.00	2.00	3.00
5.50	1.50	4.00
6.00	2.00	4.00
6.50	2.00	4.50
7.00	3.00	4.00
7.50	3.00	4.50
8.00	4.00	4.00

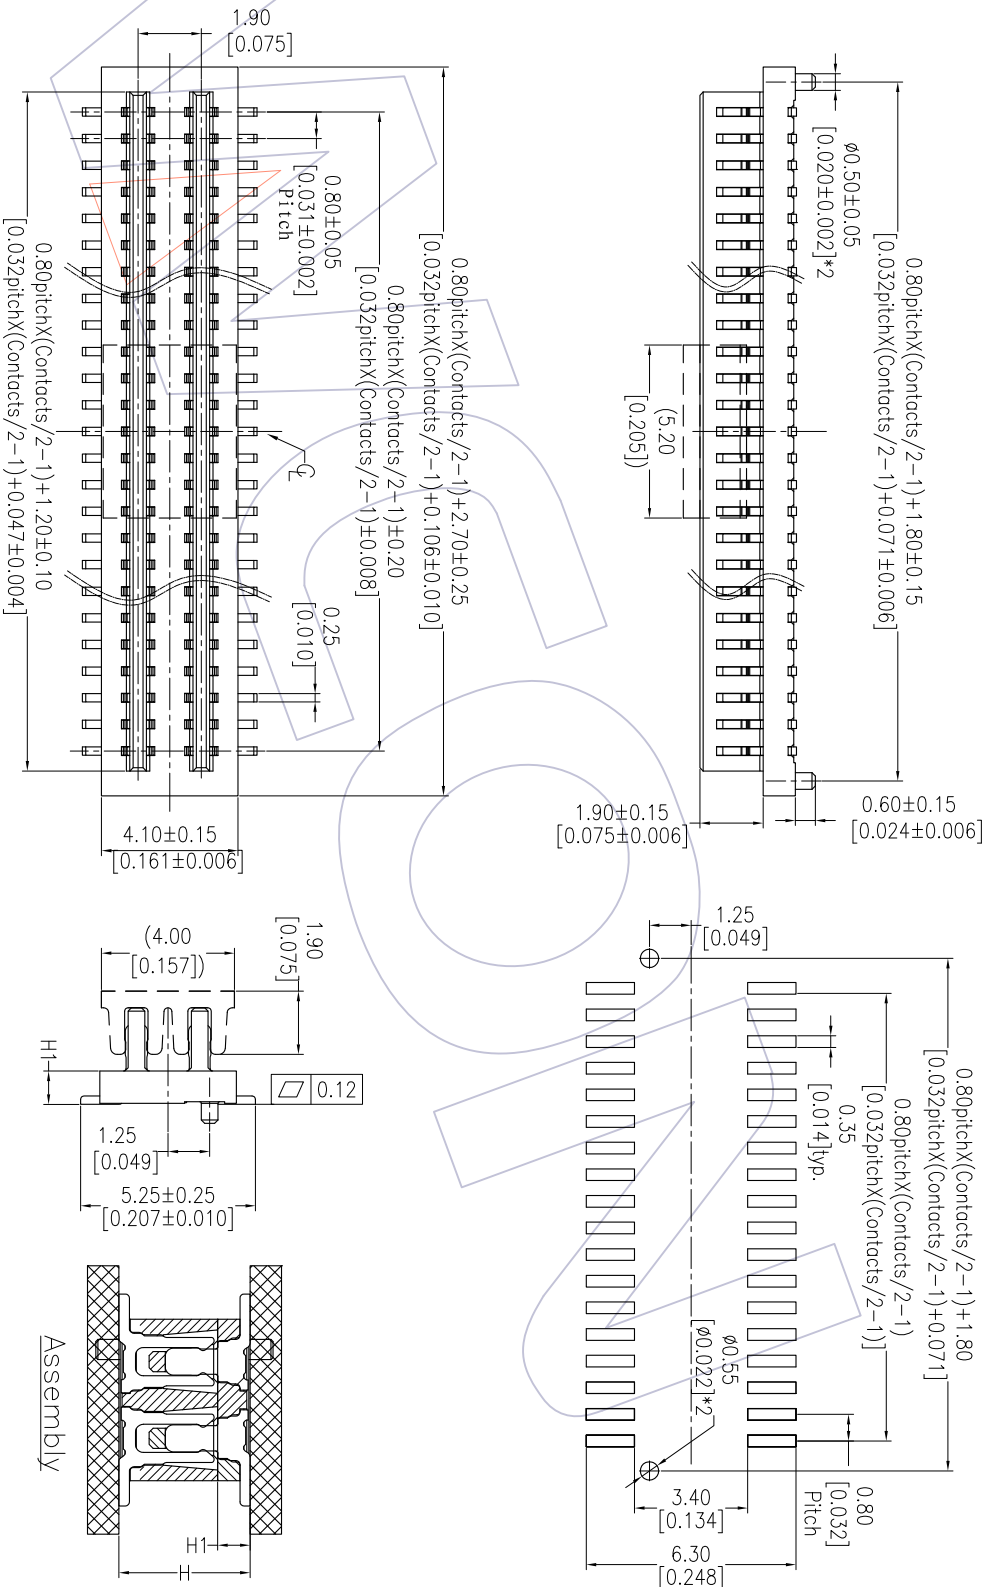

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
A0	2012/11/02	NEW		XX ±0.40	TsingSn CHECK	2012/11/02	mm A4	inch 1/1	3610-PXXX-XXXXXR01	0.80mm B TO B MALE 180° SMT TYPE	Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
1				XX ±0.25								
				XX ±0.15								
				Angle ± 3°	APPROVE	DATE						
				DIM	TOL							



Http: www.wcon.com