



NOTES:

Rated Current: 0.75AMP
 Contact Resistance: 30mΩ max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -40°C to +105°C





Contact Material: Brass
 Contact Plating: Au Over Ni
 Insulator Material: PA9T+30%GF UL94V-0 BK

Ordering Information

1515-22 XX XX M 090 X X

No. of Pins Contact Plating Pin Length Series No.
 Per Row: 01-50 G0=Gold Flash L=B+C+D+W₂ U0 1=Type 1
 G3=10u"Gold Standard(90)=9.0 2=Type 2
 G4=15u"Gold
 G5=30u"Gold
 Packing T=Tube P=Tube+CAP R=Tube&Reel+CAP

Item	Pin Length	W	D	B	C
Standard	9.00	5.00	0.10	1.90	5.00
Alternate					

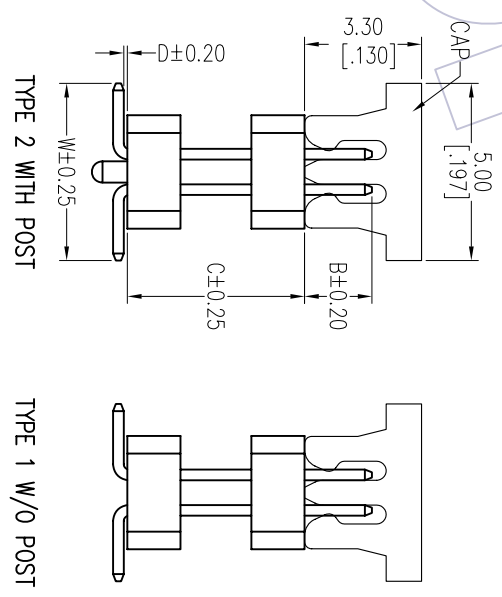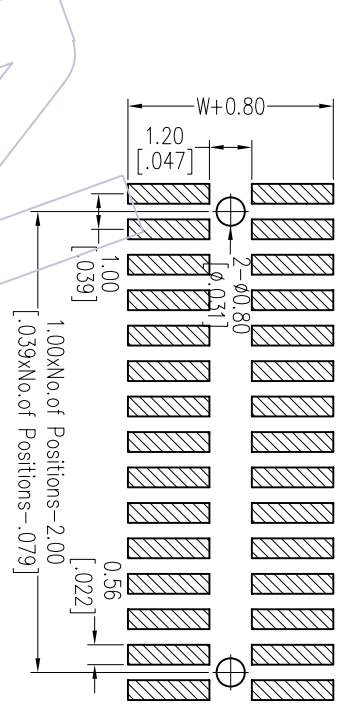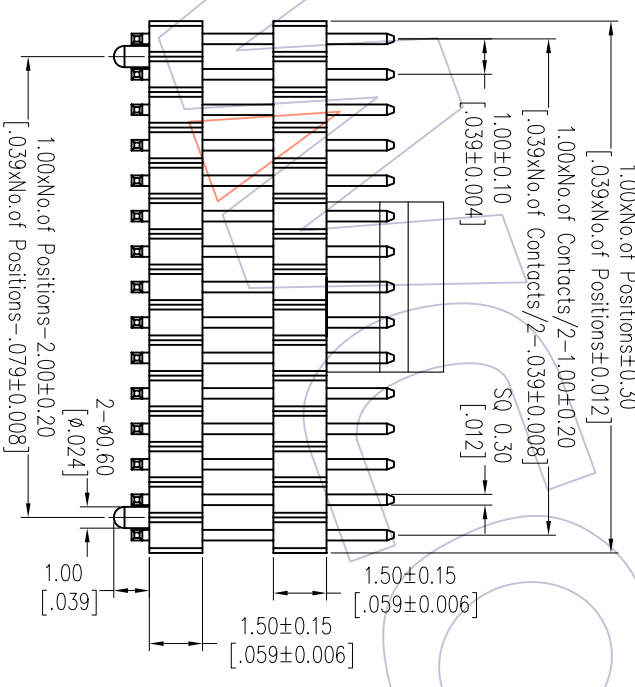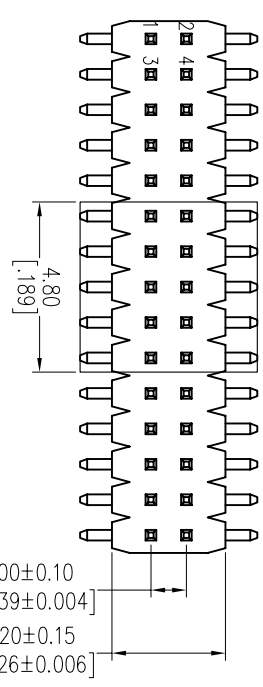

OPERATION		DRAW		DATE		SCALE		PART NO.		TITLE:		WCON-Dongguan		WCON-Kunshan	
XX		JYHuang		2012.11.21		Fit		1515-22XXXXXX		PH1.00 DUAL ROW		Http: www.wcon.com		Tel: +86 769 85358920	
XX		CHECK		DATE		UNIT		DOUBLE PLASTIC SMT H=1.5		Customer NO.		Tel: +86 512 57468408		Tel: +86 512 57468408	
X.XXX		±0.25		DATE		mm						Fax: +86 769 85358915		Fax: +86 512 57468468	
X.XXX		±0.15		DATE		A4						E-mail: sales@wcon.com		E-mail: sales@wcon.com	
Angle		± 3°		DATE		SHEET									
APPROVE		APPROVE		DATE		1/1									
CHANGE		CHANGE		DATE		PROJ.									
DIM		DIM		DATE		PROJ.									
TOL		TOL		DATE		PROJ.									
MODIFICATION DESCRIPTION		MODIFICATION DESCRIPTION		DATE		PROJ.									
NEW		NEW		DATE		PROJ.									
Modify the material		Modify the material		DATE		PROJ.									
2012/11/20		2012/11/20		DATE		PROJ.									
2012/03/01		2012/03/01		DATE		PROJ.									
DATE		DATE		DATE		PROJ.									

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)



WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com