





# HSP

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

**NOTES:**

Rated Current: 5.0A  
Contact Resistance: 10mΩ max  
Withstand Voltage: 1500V AC/Minute  
Insulation Resistance: 1000MΩ min  
Operation Temperature: -25°C to +85°C

Contact Material: Brass  
Contact plating: Au or Sn over Ni  
Insulator Material: PA66

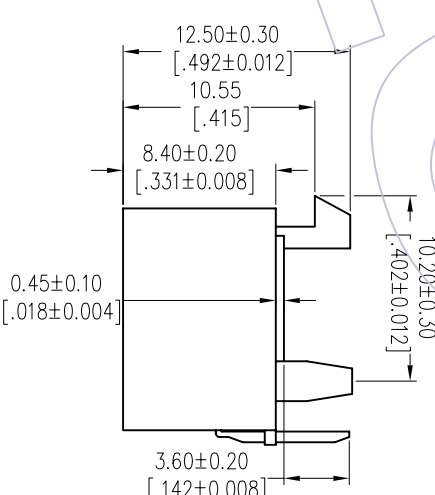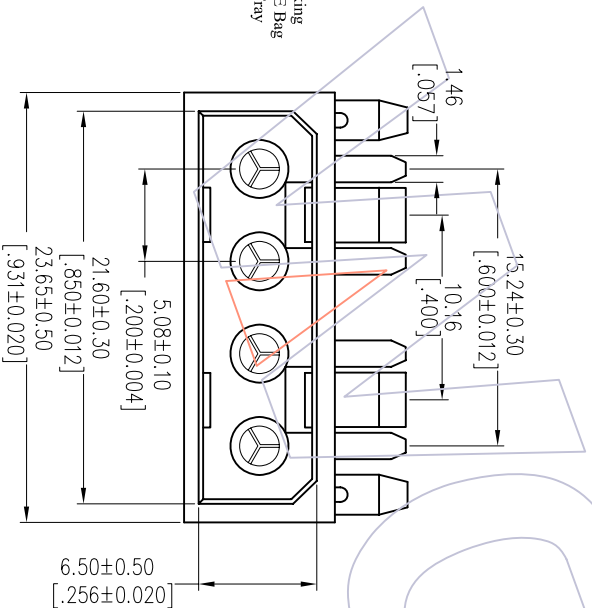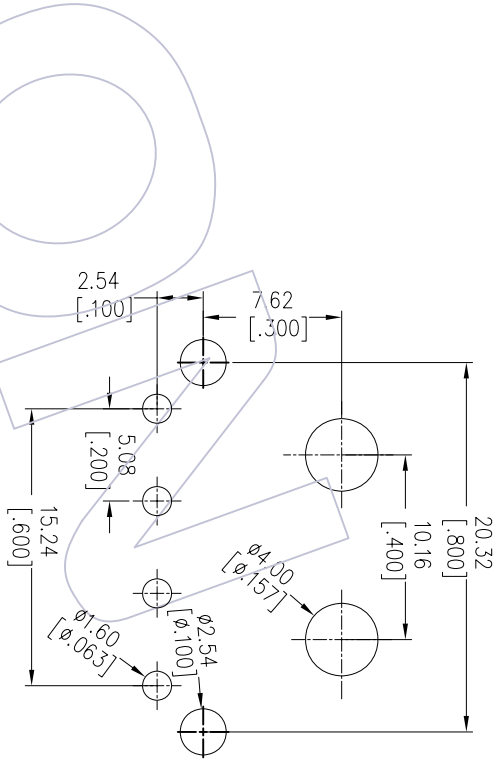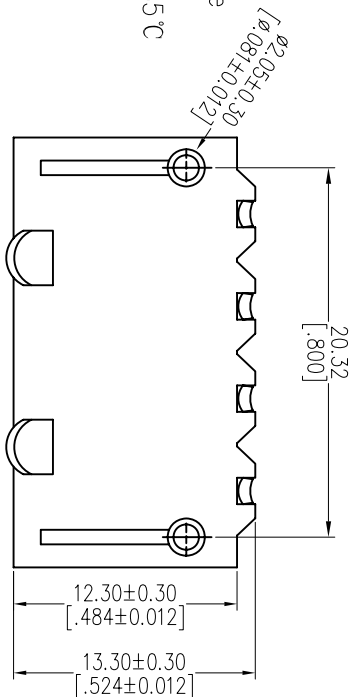

## Ordering Information

WF5084-WR 04 W 0 1

No. of pins Contact Plating Color Packing  
S0=Gold Flash/Tin B=Black O=PE Bag  
S3=10u"Gold/Tin W=White A=Tray  
S4=15u"Gold/Tin  
S5=30u"Gold/Tin  
G0=Gold Flash  
G3=10u"Gold  
G4=15u"Gold  
G5=30u"Gold  
Blank=Tin

REV	DATE	MODIFICATION DESCRIPTION
AO	2012/09/18	NEW

OPERATION	DRAW	DATE
X.X	JYHuang	2012/09/18
X.XX	CHECK	DATE
X.XXX		
Angle	APPROVE	DATE
± 3°		

SCALE	FIT
UNIT	PROJ.
SIZE	
SHEET	
PROJ.	

PART NO.	TITLE:
WF5084-WR04W01	5.08 WAFER 1*4P 90° DIP
CUSTOMER NO.	

**WCON**

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920  
WCON-Kunshan Tel: +86 512 57468408  
Tel: +86 769 85358915 Fax: +86 512 57468468  
E-mail: sales@wcon.com E-mail: sales@wcon.com