

# HSF


NOTES:  
 Current Rating: 1AMP  
 Contact Resistance: 20mΩ max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
 Contact plating: Au or Sn over Ni  
 Insulator Material: PBT+30%GF (UL94V-0)

## Ordering Information

6312-068 R I SX M N X 0X

No. of Pins  
 Contact Plating  
 SO=Gold Flash/Tin  
 S3=10u"Gold/Tin  
 S4=15u"Gold/Tin  
 S5=30u"Gold/Tin  
 SN=Tin  
 SM=Mate Tin  
 Packing  
 T=Tube  
 A=Tray

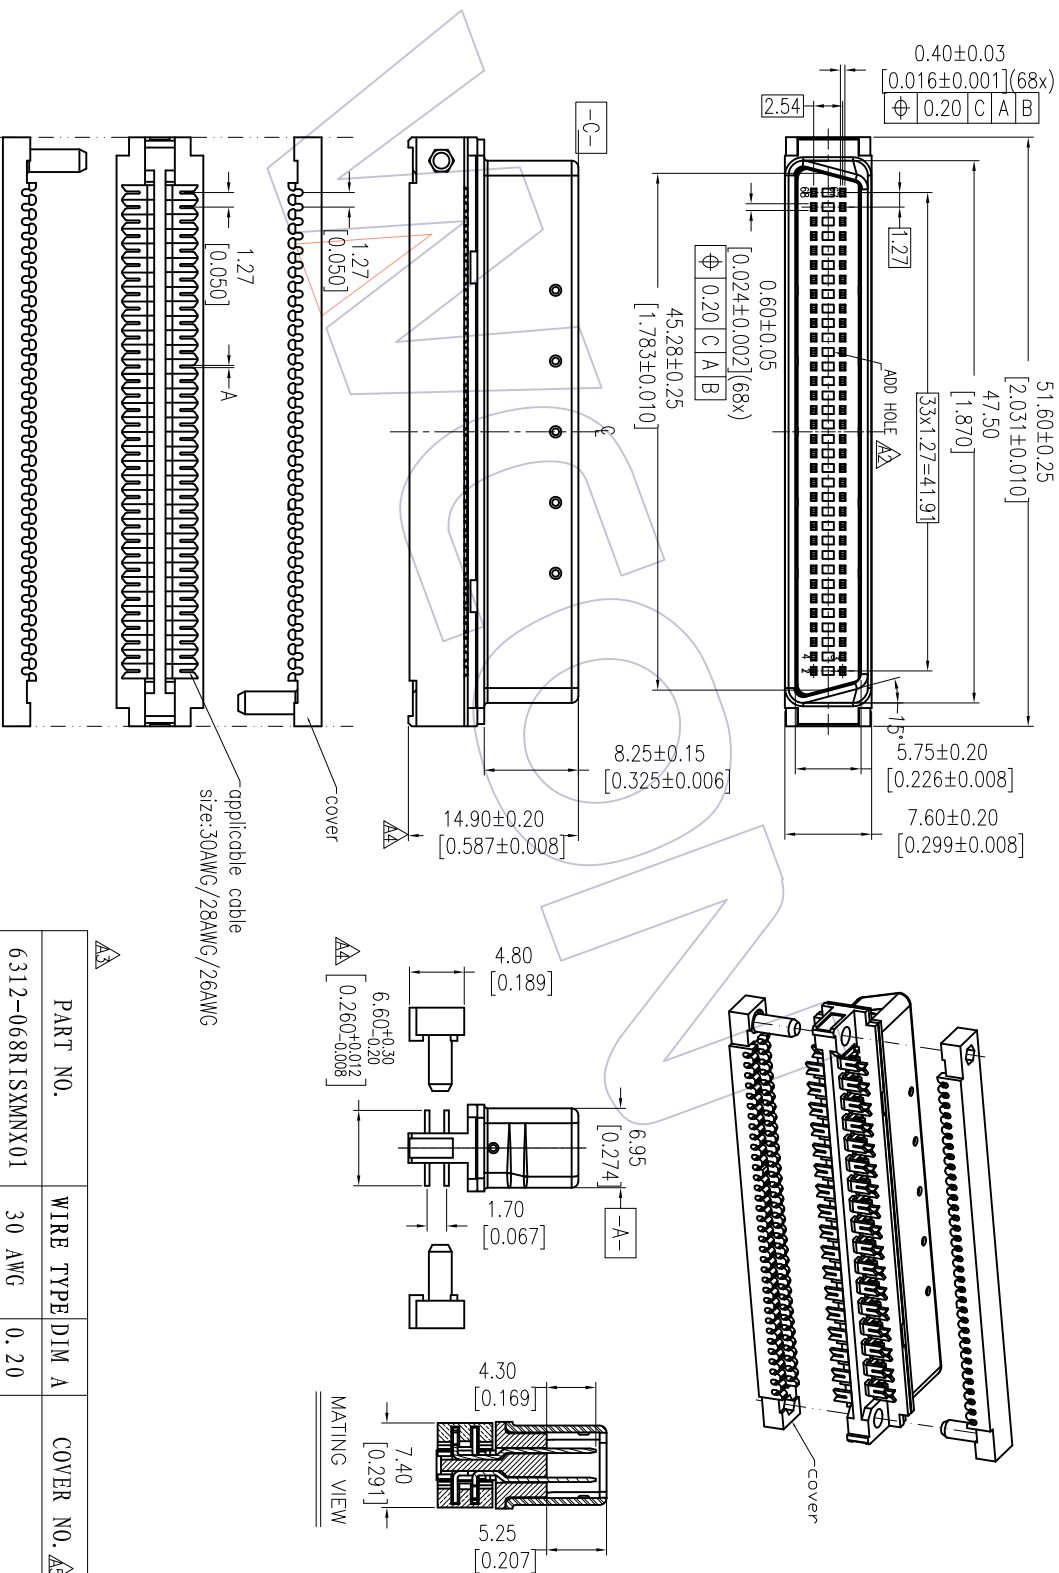

PART NO.	WIRE TYPE	DIM A	COVER NO.
6312-068RISXMNX01	30 AWG	0.20	G6312-68BC01
6312-068RISXMNX02	28 AWG	0.20	
6312-068RISXMNX03	26 AWG	0.28	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	Customer NO.
A5	2012/10/29	Modify The Cover Type	△	XX	Tsingnsn	2012/10/29	mm	1/1	6312-068RISXMNX0X	1.27x2.54 SCS1	
A4	2012/05/09	Change the dimension	△	XX	CHECK		inch	A4		Male D-SUB IDC Type	
A3	2012/05/21	Add Right Table	△	X.XXX							
A0	2010/12/03	NEW		X.XXX							
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	APPROVE	DATE	± 3'				

# WCON

WCON-Dongguan  
 Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com

WCON-Kunshan  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com