
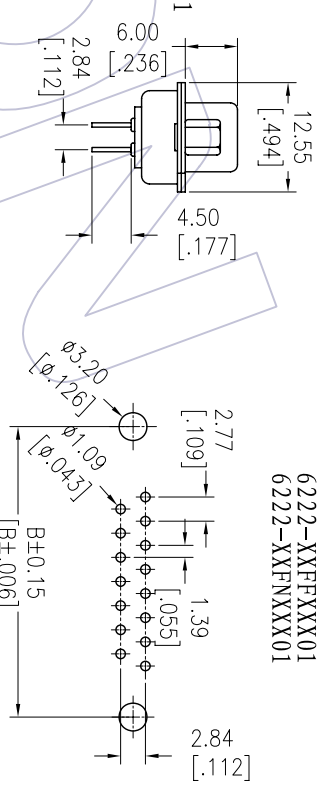
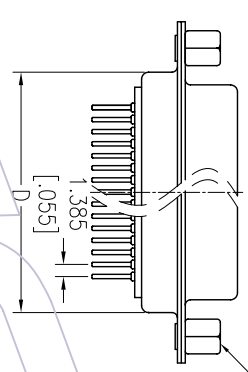


HSF

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:
 Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -55°C to +105°C


Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F U194V-0
 Shell: Cold Roller Steel, Ni Or Sn Plated
 Nut: Brass, Sn Over Ni Plated

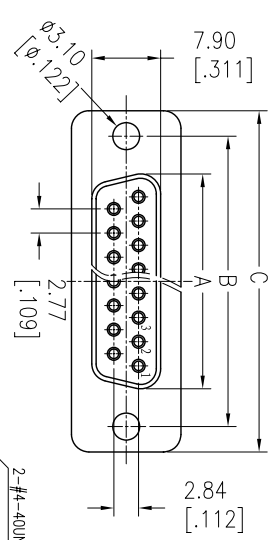

Ordering Information

6222-XX F X XX B 01


- No. of Pins: 9P, 15P, 25P, 37P
- Type: Y=With Back Fork, B=With Back Nut, F=With Front Nut, H=With Back Fork and Screw, N=Without Fork Without Nut
- Contact Plating: S0=Gold Flash/Tin, S3=10μ"Gold/Tin, S4=15μ"Gold/Tin, S5=30μ"Gold/Tin, SN=Tim
- Insulator Color: B:Black, U:Blue

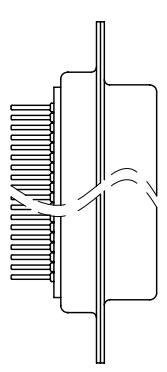

6222-XXFNS0X01

6222-XXFYS0X01

6222-XXFBS0X01

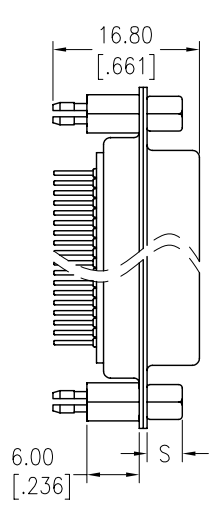

NAME	DIM "S"			
NUT	3.00 [0.118]	4.00 [0.157]	4.80 [0.189]	6.00 [0.236]
PIN	DIM "A"	DIM "B"	DIM "C"	DIM "D"
09	16.33 (0.643)	24.99 (0.984)	30.81 (1.213)	19.28 (0.759)
15	24.66 (0.971)	33.32 (1.312)	39.14 (1.541)	27.70 (1.091)
25	38.38 (1.511)	47.04 (1.852)	53.10 (2.091)	41.10 (1.618)
37	54.84 (2.159)	63.50 (2.500)	69.32 (2.729)	57.30 (2.256)

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:
A0	2012/12/04	NEW		XX	JYHuong	2012/12/04	mm	A4	6222-XXFXXXXX01	D-SUB FEMALE DUAL ROW 180° DIP
				X.XXX	CHECK	DATE	SIZE	SHEET		
				Angle	APPROVE	DATE	1/1	PROJ.		Customer NO.
				DIM						