HSF

NOTES:
Current Rating: 5.0AMP
Contact Resistance: 25mΩ Max
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 5000MΩ Min
Operation Temperature: -55℃ to +105℃

Contact Material:Brass
Contact plating:Au Or Sn over Ni
Insulator Material:PBT+30%G.F UL94V-0
Shell Material:Spcc,Plating: Ni Plated
Rivet/Harpoon:Brass,Sn over Ni
Screw:Brass,Plating Ni Plated

Ordering Information

6200- X 09 M X 09 F X XX X X

- Dim of Dual Port: Center A=15.88mm; Center B=19.05mm
- Up Port Type: F=Female; M=Male
- Up Port Color: B=Black; U=Blue; N=Green
- Down Port Type: F=Female; M=Male
- Down Port Color: B=Black; U=Blue; N=Green
- Contact Plating: S0=Gold Flash/Tin; S3=10u"Gold/Tin; S4=15u"Gold/Tin; S5=30u"Gold/Tin; SN=Tin
- Bracket Material: 0=Zinc Alloy; 1=SPCC

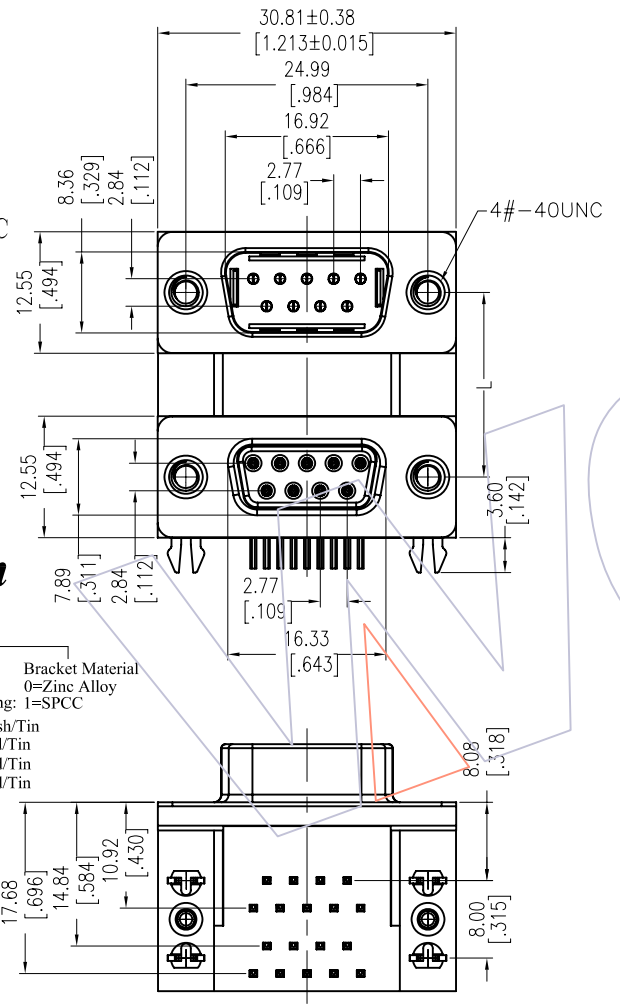

6200-X09MX09FXXX11((WITHOUT SCREW)

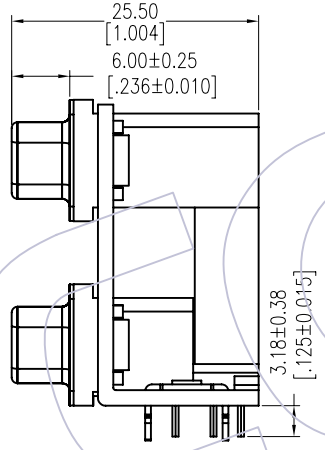

6200-X09MX09FXXX12(WITH SCREW)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

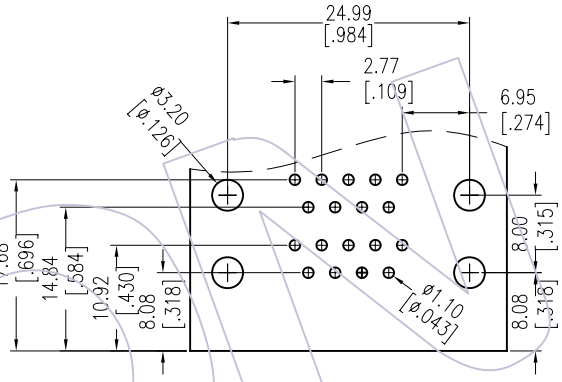

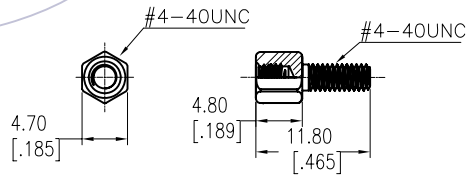

SCREW

Dim of Dual Port Center	DIM L
15.88mm	A
19.05mm	B

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/12/27	NEW	------

OPERATION		DRAW	DATE	SCALE	FIT
X.X	±0.40	JYHuang	2012/12/27	UNIT	mm
X.XX	±0.25	CHECK	DATE	SIZE	A4
X.XXX	±0.15			SHEET	1/1
Angle	± 3°	APPROVE	DATE	PROJ.	
DIM	TOL				

PART NO. 6200-X09MX09FXXXXX

TITLE: D-SUB Right Angle Connector Dual Row

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com