

HSF

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:
 Current Rating: 5.0AMP
 Contact Resistance: 25mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 5000MΩ Min
 Operation Temperature: -55°C to +105°C

Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0
 Shell Material: Spcc, Plating: Ni Plated
 Rivet/Harpoon: Brass, Sn over Ni
 Screw: Brass, Plating Ni Plated

Ordering Information

6200-X 09 F X 09 F X XX X X


Dim of Dual Port Center A=15.88mm
 Center B=19.05mm

Down Port Color
 B=Black
 U=Blue
 N=Green


Contact Plating: I=SPCC
 O=Zinc Alloy

Bracket Material
 O=Zinc Alloy

Up Port Type Up Port Color Down Port Type
 F=Female B=Black F=Female
 U=Blue U=Blue M=Male
 N=Green N=Green S=30u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tin

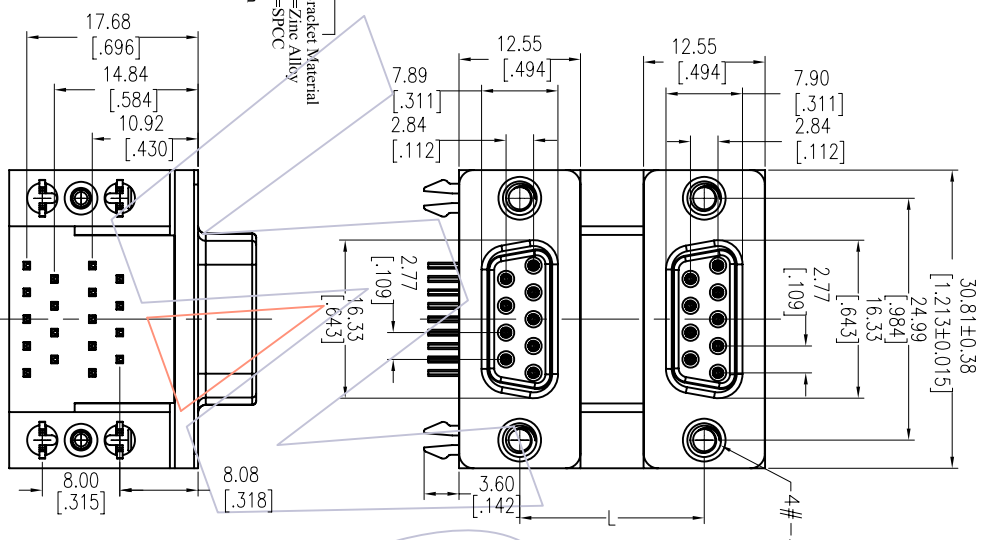


6200-X09FX09FXXX1(WITHOUT SCREW)

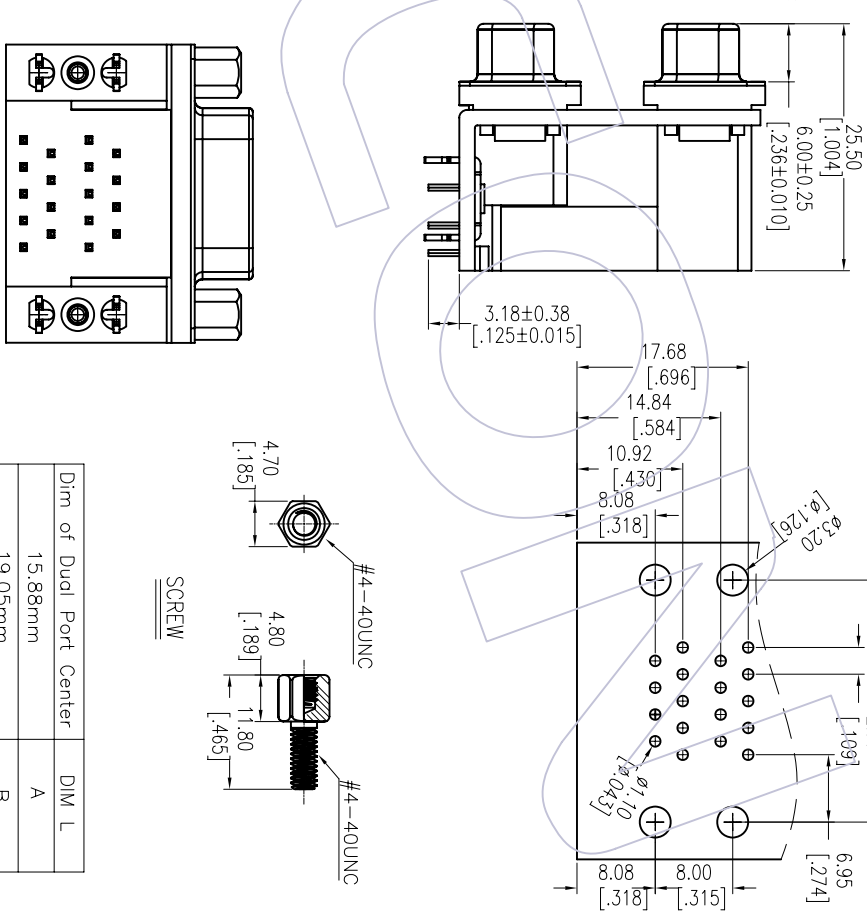

6200-X09FX09FXXX1(2(WITH SCREW)

Dim of Dual Port Center	DIM L
15.88mm	A
19.05mm	B

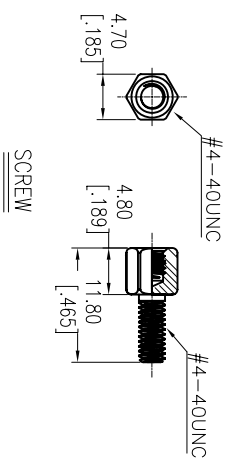

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2013/01/10	NEW	-----

OPERATION	DRAW	DATE
XX ±0.40	JTHuang	2013/01/10
XXX ±0.25	CHECK	DATE
X.XXX ±0.15	CHECK	DATE

SCALE	FIT	PART NO.
UNIT mm	A4	6200-X09FX09FXXXXX
SIZE A4	1/1	TITLE: D-SUB Right Angle Connector
SHEET 1/1	PROJ.	Customer NO.

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
---	--