

HSF

NOTES:


Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C
 Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F UL94V-0

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Ordering Information

1537-11 XX XX Z 091 X X

No.of Pins Per Row:02-50
 Contact Plating
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 Sn=Tin
 Pin Length
 Packing
 1=Type1
 2=Type2
 A=Tray
 R=Tray&Reel

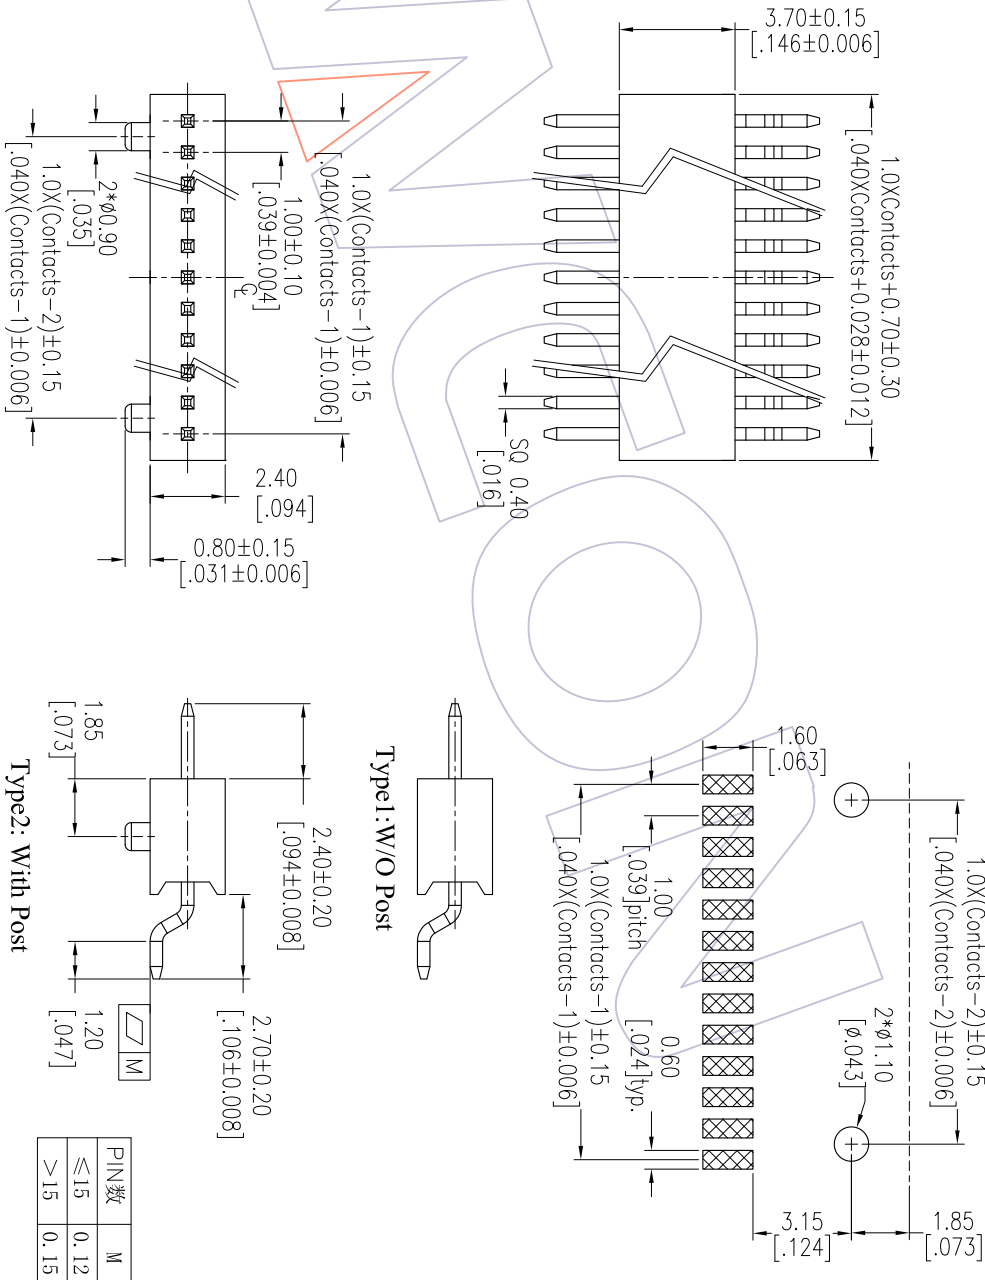

Item	Pitch	Mating
Standard	1.00	2537
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	Customer NO.	WCON-Dongguan	WCON-Kunshan
A0	2013/08/19	NEW	-----	X.XX	JHuang	2013/08/19	mm	A4	1537-11XXXXZ091XX	PHI. 0mm SINGLE ROW 90° SMT H=3.70(W/0 Post/With Post/)		Tel: +86 769 85358920	Tel: +86 512 57468408
				X.XXX	CHECK	DATE	SIZE	1/1				Fax: +86 769 85358915	Fax: +86 512 57468468
				Angle	APPROVE	DATE	SHEET					E-mail: sales@wcon.com	E-mail: sales@wcon.com
				± 3'	PROJ.		PROJ.						

WCON

Http: www.wcon.com

1 2 3 4 5 6 7 8 9 10