

HSF

NOTES:

Rated Current: 2.0AMP
 Contact Resistance: 20mΩ max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact Plating: Au Or Sn Over Ni
 Insulator Material: PA9T+30%G.F UL94V-0

Ordering Information






2249 - 2 XX R XX CUNT 1

No. of Pins per Row: 02-40Pins

Contact Plating:
 G0=Gold Flash
 G3=10μ Gold
 G4=15μ Gold
 G5=30μ Gold
 SF=Gold Flash/Tin
 S9=10μ Gold/Tin
 S4=15μ Gold/Tin
 S5=30μ Gold/Tin
 SN=Tin
 SW=Matte Tin

Packaging:
 T=Tube
 P=Tube-CAP
 R=Tube&Reel-CAP

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

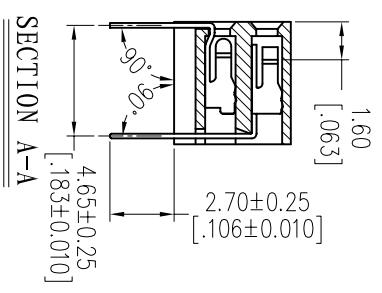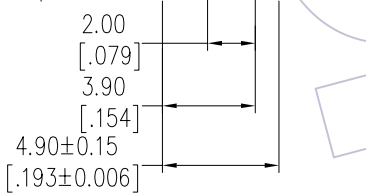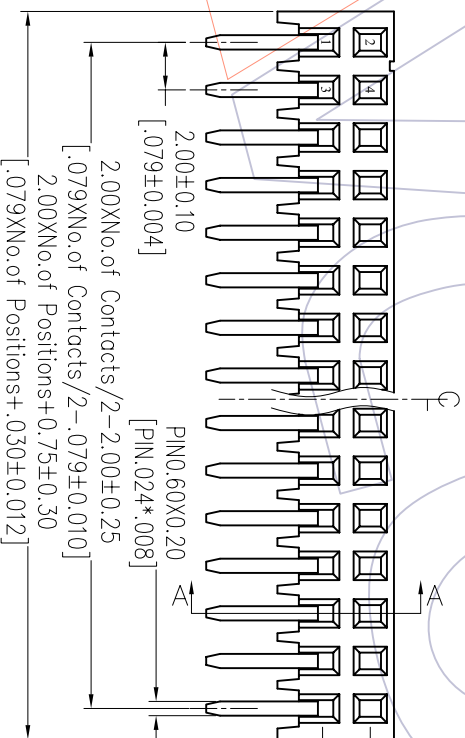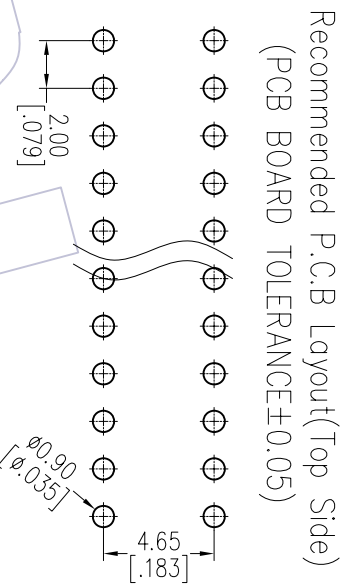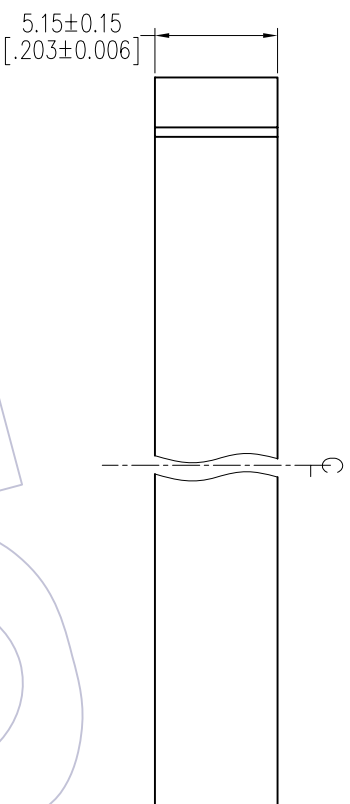

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX	JYHuog	2012/07/17	UNIT	mm	2249-2XXRXXCUNT1
XX	CHECK	DATE	SIZE	A4	TITLE:
X.XXX	±0.15		SHEET	1/1	FIG. 0.0mm DUAL ROW 90° DIP SIDE INSERT
Angle	± 3°	APPROVE	PROJ.	Customer NO.	
CHANG	DIM	TOL			
REV	DATE	MODIFICATION DESCRIPTION			
A0	2012/07/17	NEW			
1					

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com